

THE AZNALCÓLLAR PIT LAKE – WATER QUALITY AND OPTIONS OF CONTROL¹

Martin Schultze, Kurt Friese, Javier Sánchez, and Enrique López²

Abstract: The Aznalcóllar mine is well known since the disaster in 1998. A dam of the tailings impoundment broke and about 4 million m³ of acidic water and 2 million m³ of sludge contaminated the river system Rio Agrio-Rio Guadiamar-Rio Guadalquivir with heavy metals. A lot of research has been done to quantify the consequences of the disaster for the river system and to prove the success of the remediation measures. But little is known about the state and the perspectives of the rising lake in the former mine pit.

Parts of the Aznalcóllar pit have been used to dump waste rock from the neighboring pit Los Frailes. Additionally, tailings material and contaminated soil from the river system were deposited in the former mine pit. Consequently, the pit lake sediments are very heterogeneous and highly enriched in heavy metals reaching ore-grade concentrations for some elements. Actually, the pit lake water level is regulated by pumping to stay at least 6 m below the natural groundwater level. The water is acidic (pH 3.6) and has high concentrations of metals (e.g. 800 mg/L Zn, 200 mg/L Mn, 100 mg/L Al, 2000 µg/L Cd). The major concern is that the contaminated lake water may enter the river system and the top aquifer when the lake reaches its natural water level.

Based on recent knowledge, options of future remediation of the lake water quality are discussed.

Additional Key Words: acidification, heavy metals, remediation

¹ Poster paper presented at the 7th International Conference on Acid Rock Drainage (ICARD), March 26-30, 2006, St. Louis MO. R.I. Barnhisel (ed.) Published by the American Society of Mining and Reclamation (ASMR), 3134 Montavesta Road, Lexington, KY 40502

² Martin Schultze is limno-chemist, Kurt Friese is geo-chemist, both at the Department of Lake Research of the UFZ Centre for Environmental Research, Magdeburg, 39114, Germany, Javier Sánchez and Enrique López are geologists at the Direccion de Recursos Minerales y Geoambiente, Instituto Geológico y Minero de España (IGME), Madrid, 28003, Spain.

7th International Conference on Acid Rock Drainage, 2006 pp 1927-1935

DOI: 10.21000/JASMR06021927

<https://doi.org/10.21000/JASMR06021975>

Introduction

The Aznalcóllar mine site is known worldwide because of the failure of a tailings dam in April 1998. Highly contaminated water (about $4 \times 10^6 \text{ m}^3$) and sludge ($2 \times 10^6 \text{ m}^3$) were released from the tailings pond, resulting in a large scale contamination of the Guadiamar river and its flood plains (Grimalt 1999). A lot of research has been done on the consequences of the dam failure for the contaminated river and flood plain areas (e.g. Alastuey et al. 1999, Prat et al. 1999, Madejon et al. 2003, Hudson-Edwards et al. 2003, Sola et al. 2004, Olias 2005, 2006). But little is known about the pit lake in the former Aznalcóllar mine. It is used as disposal site for contaminated materials which were removed during the rehabilitation of the contaminated areas along the Guadiamar river (Hudson-Edwards et al. 2003) and around the former ore processing facilities. The purpose of this paper is to present an overview on the results of recent research. Water and sediment samples were taken during four field surveys (November 2002, December 2003, November 2004, and April 2005). In this paper, only results for the lake water quality will be presented. Based on recent knowledge, options of future remediation of the lake water quality are discussed.

Recent state of the Aznalcóllar pit lake

The Aznalcóllar pit lake is situated about 30 km north-west to Sevilla (Spain) in the eastern part of the Iberian Pyrite Belt (Fig. 1). From historical climatic records obtained from the series 1975-2004 (Junta de Andalucía, *unpublished data*), it is concluded that the average annual precipitation of the Aznalcóllar area is around 600 mm, with a marked seasonal variation (70% of the rainfall is commonly concentrated in the months from November to March). The evaporation is also strongly variable throughout the year, from 250 mm/day during the summer, to almost zero during the winter months. The water table fluctuates due to periodic pumping carried out to keep it far below the local groundwater table. The maximum lake water depth varied around 35 m, the surface area around 0.3 km^2 and the volume around $9 \times 10^6 \text{ m}^3$. The pit wall composition includes several detrital and volcanic lithologies such as felsic epiclastites, dacite porphyries, purple tuffites, black shales and vitric to crystalline tuffs, in addition to the massive sulphide lenses (Almodóvar et al., 1998). Thermal stratification was observed only in April 2005, but it did not result in remarkable vertical differences in water chemistry. The lack of differences was likely due to the fact that the thermal stratification had just begun its development. An overview of the water chemistry is given in Table 1.

The main reasons for the variability in water chemistry are (1) the use of the lake as disposal site for contaminated material (ranging from organic matter-rich soils to pyritic ashes) and (2) the water management of the mine site. Every new input of contaminated material is accompanied by the dissolution of substances. More than a million cubic meters of solids were deposited in the lake since 2002. As mentioned above, the water management has also a remarkable impact on the water quality. Surface runoff and ground water from the remediated former tailings pond, from the former ore processing facility and from a part of the waste rock piles are collected in a small pond and periodically pumped to the lake if the pond is filled. This mixture of clean and contaminated water accounts for about 80% of the total superficial inflow into the lake. The remaining 20% is a direct inflow of contaminated water from the waste rock piles (approximately 100 hectares footprint). In order to keep the water level below the

groundwater table, lake water is periodically pumped, treated and then diverted to the Agrio river. At a pH of approximately 9.5, the sludge produced in the treatment facility is pumped back into the lake. As a consequence of this procedure, in addition to the seasonal variations in runoff, the inflows into the lake are highly variable both with respect to the flow rates and with respect to their chemistry and contaminant load.

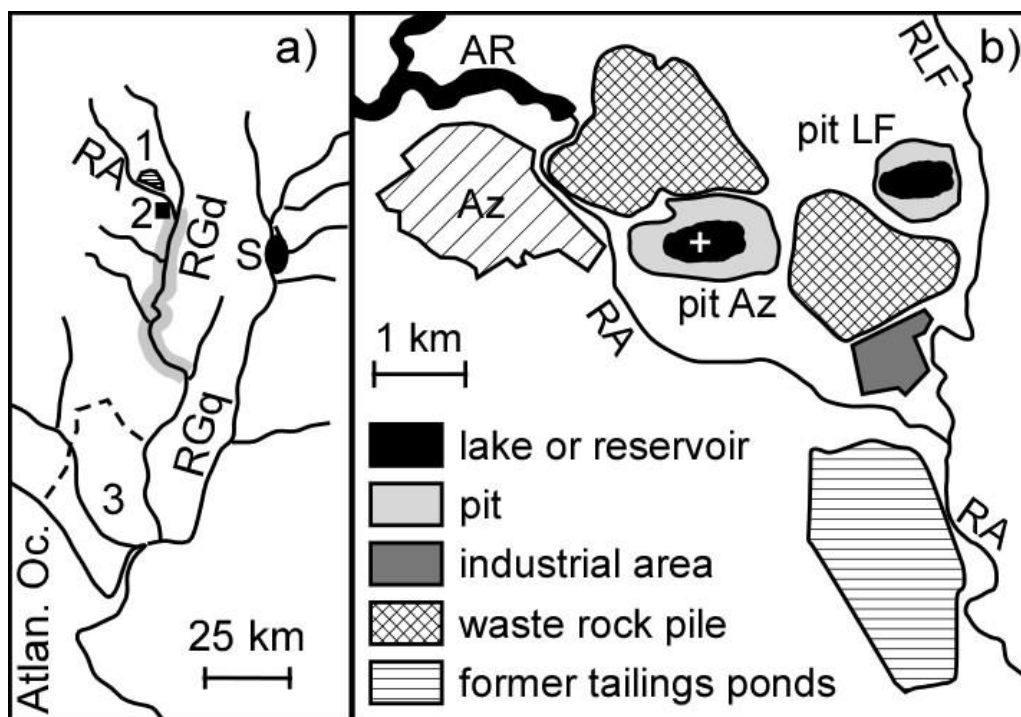


Figure 1. Location of the Aznalcollar pit lake. Panel a): 1 – mining area, 2 – former tailings ponds, 3 – Donana national park, S – Sevillia, RA – Rio Argio, RGd – Rio Guadamar, RGq – Rio Guadalquivir, Atlan. Oc. – Atlantic Ocean, gray area – area contaminated by the failure of the tailings dam in 1998. Panel b): Az – Aznalcollar, RA – Rio Argio, AR – Agrio reservoir, RLF – Rio Los Frailes, pit Az – pit Aznalcollar, pit LF – pit Los Frailes

A comparison of the observed water quality with results from other pit lakes in other ore mining districts (Levy et al. 1997, Parshley and Howell 2003, McNee et al. 2003, Lewis et al. 2003, Lu 2004, Dowling et al. 2004, Pellicori et al. 2005) shows that the metal concentrations in the Aznalcollar pit lake lies within the wide variation of reported data. But also within this comparison the concentrations in the Aznalcollar pit lake have to be called very high, especially for Zn and Cu. The mentioned variation is caused by the different geological settings of the pit lakes and the differences in the dominating ore minerals as well as by the limnological conditions of the pit lakes (e.g. occurrence of permanent chemical stratification, rate of water renewal, application of remediation technologies).

Table 1. Water chemistry in the Aznalcóllar pit lake between 2002 and 2005 (selected parameters, all concentrations in mg/L except pH, n.a. – not analysed).

	November 2002	December 2003	November 2004	April 2005
pH	5.3-5.4	3.7	3.8	4.0-4.5
SO ₄ ⁻²	4700-4920	5490-5720	8070-8290	7790-8220
Cl ⁻	106-110	65.9-85.3	84.1-98.0	59.2-63.2
Na ⁺	84.0-86.0	73.3-75.9	51.4-75.2	70.5-94.5
K ⁺	33.0-34.0	25.6-26.5	13.2-19.0	17.0-24.5
Mg ⁺²	n.a.	777-807	806-1140	1120-1540
Ca ⁺²	600-620	490-509	418-591	523-730
Al	1.6-3.3	51.5-56.9	108-157	109-130
Fe	130-140	3.8-10.7	1.6-2.8	0.2-2.0
Mn	135-140	161-169	141-201	183-218
Zn	310-320	434-450	638-899	834-1010
Cu	0.03-0.13	7.9-8.2	37.0-40.0	31.8-35.2
Cd	0.65-0.68	1.01-1.05	2.10-2.20	1.90-2.05

Options of remediation

Recently there is no clear concept for the future use of the pit lake (at the present moment (December 2005), the pit lake is being used as a disposal site for pyrite-rich rocks from the adjacent S-3 waste-rock pile, and this situation is expected to continue during the year 2006). In addition, the hydrologic regime is not completely known for the recent state as well as for a future final state. Therefore only some general options of remediation are briefly discussed here.

Chemical neutralization:

The chemical neutralization of lake water is based on the introduction of alkaline substances as lime, soda or ashes into the lake. It removes the acidity by acid-base reactions and metals by the precipitation of metal hydroxides. The availability of experiences from the neutralization of acidic lakes in Scandinavia and North America using lime or soda (e.g. Olem 1991, Lu 2004) and from AMD-treatment plants can be seen as an advantage of this approach of remediation, although the majority of neutralized lakes had been acidified by acid rain. But risks result from the different geochemistry of different metals: not all metals are precipitated in the pH-range 7-8 which is typically required for aquatic life and lake use. Higher pH-values may result in re-dissolution of precipitated metals from the sediment. The results of Loop et al. 2003 indicate that the addition of alkaline substances may easily result in very high pH (>11) due to the lack of sufficient buffering systems for the circum-neutral range in formerly acidic waters.

Neutralization based on sulphate reduction

The microbial reduction of solid Fe^{+3} and SO_4^{-2} is accompanied by a consumption of acidity and, thus, can contribute to the neutralization of acidic mine water. Additionally, metal sulfides are formed which are nearly insoluble under reducing conditions. Numerous technological approaches try to use this effect to neutralize pit lakes (e.g. Klapper et al. 1998, Castro & Moore 2000, Glombitza 2001, Frömmichen et al 2003, 2004, Lu 2004). The use of naturally occurring processes is an advantage of these technologies with respect to the public acceptance of such approaches. But on the other hand, organic material has to be introduced into the lakes. This may be seen as a new source of hazards. Reports of long term success of such an approach are not available. A number of tests failed (Brugham et al. 1995, Brugham and Stahl 2000, Lessmann et al. 2003a). Some technological approaches are still under development (Koschorreck et al. 2002a, b). In addition, the contact of the produced sulfides to O_2 , NO_3^- or Fe^{+3} has to be avoided to prevent re-oxidation. Otherwise the remediation would fail because of the processes described by Peine et al. 2001.

Removal of the metals by artificial eutrophication

Algae can act as “collectors” for heavy metals and trace elements by adsorption and incorporation during their growth. Some laboratory and field tests have been performed to test this remediation approach in the last years (Martin et al. 2003a, McNee et al. 2003, Poling et al. 2003, Dessouki et al. 2005). Remarkable success was reported. But little is known about the long-term stability of the binding of the metals in the lake sediments. The microbial decay of the biomass of the algae may force SO_4^{-2} reduction and, thus, the formation of sulfides with very low solubility under reducing conditions, which are common in lake sediments. But if SO_4^{-2} reduction does not occur with sufficient rates the only effect of microbial decay will be the liberation of the heavy metals and trace elements which had been accumulated by algae before. Martin et al. (2003b) and Martin and Pedersen 2004 reported remarkable risks of re-dissolution of the precipitated metals and trace elements.

Introduction of river water

The introduction of river water may be used to prevent acidification of pit lakes during their filling and to neutralize filled pit lakes as well (Klapper and Schultze 1995, Lessmann et al. 2003b, Schultze et al. 2005). The neutralization is caused mainly by the HCO_3^- content of the river water. Other processes also contribute to the neutralization. The extent of these contributions depends on the particular circumstances (Schultze et al. 2005). Good experiences were obtained by the use of this approach in Germany to remediate pit lakes which result from lignite mining (Lessmann et al. 2003b, Schultze et al. 2005). Problems may result from a lack of river water, from poor river water quality and the overflow of still contaminated water if the remediated lake is already filled.

Artificial creation of meromixis

Meromixis, i.e. the exclusion of a part of the water body of lakes from periodic overturn, result in extremely low exchange rates between the upper periodically mixed part of the lakes (called mixolimnion) and the lower stagnant part (called monimolimnion). Sedimentation transports substances from the mixolimnion into the monimolimnion. But diffusion is the only mechanism exporting substances from monimolimnion to mixolimnion. In this way the monimolimnion acts as an accumulation site within meromictic lakes. Fisher (2002) reports the creation of an artificially meromictic lake in the former Island Copper Mine (Vancouver Island,

Canada): The first and main step of filling was done with sea water from the nearby ocean. Fresh water was used to form a layer with much lower density on top of the sea water and to get the filled lake permanently stratified. Acid rock drainage (ARD) from the surrounding waste rock piles and tailings is collected and diverted into the deep of the lake. In this way the contact of ARD to O₂ is minimized. The formation of further acidity by ongoing oxidation is prevented in this way and the occurrence of SO₄⁻² reduction is favored. As reported by Poling et al. (2003) the meromixis is stabilizing the success of artificial eutrophication for the removal of metals too. But the use of this approach is limited to mine sites where highly saline water is available for the artificial formation of meromixis. The planning of artificial meromixis may be complicated because the mechanisms governing the occurrence of meromixis are not completely understood (Boehrer and Schultze 2006). In addition, the ongoing pyrite oxidation in the monimolimnion of the Berkeley pit lake indicate that some of the mechanisms responsible for the advantages of artificial meromixis may be counteracted by other processes to a remarkable extend. Sudden unexpected overturns of water from the monimolimnion may liberate enormous amounts of accumulated hazardous substances (e.g. H₂S, toxic metals) to the mixolimnion or to other water bodies downstream. This may cause total fish kills there or other damages to wild life or water users.

As far as known today, there is no chemical, biological or physical treatment option which would be able to serve as single approach for a successful remediation. Additional alternatives may include control of the runoff from waste rock piles, submergence of sulfide pit walls, partial and complete backfill of the pit. The different approaches can be employed successfully only if there is no or only a very limited further introduction of acidity, heavy metals and trace elements. Some measures are necessary for the management of the water quality and solids that enter the pit, such as sludges, partially and untreated non pit waters, and contaminated wastes. Otherwise the remediation approach will fail completely or has to be employed frequently causing more and more costs. But combinations of some of the mentioned options may provide approaches for the primary rehabilitation of the Aznalcóllar pit lake, as well as for a sustainable long-term management of the lake.

Literature Cited

- Alastuey, A., A. Garcia-Sanchez, F. Lopez and X. Querol 1999. Evolution of pyrite mud weathering and mobility of heavy metals in the Guadiamar valley after the Aznalcollar spill, south-west Spain. *The Science of The Total Environment* 242, 41-55. [http://dx.doi.org/10.1016/S0048-9697\(99\)00375-7](http://dx.doi.org/10.1016/S0048-9697(99)00375-7).
- Almodóvar, G.R., R. Sáez, J.M. Pons, A. Maestre, M. Toscano and E. Pascual 1998. Geology and genesis of the Aznalcóllar massive sulphide deposits, Iberian Pyrite Belt, Spain. *Mineralium Deposita* 33, 111-136.
- Boehrer and Schultze 2006. On the relevance of meromixis in mine pit lakes. *Proceedings of the 7th ICARD (this volume)*. pages 200-213
<https://doi.org/10.21000/JASMR06020200>
- Brugam, R.B., J. Gastineau and E. Ratcliff 1995. The neutralization of acidic coal mine lakes by additions of natural organic matter: a mesocosm test. *Hydrobiologia* 316, 153-159. <http://dx.doi.org/10.1007/BF00016896>.

- Brugam, R.B. and J.B. Stahl 2000. The potential of organic matter addition for neutralizing surface mine lakes. *Transactions of the Illinois State Academy of Science* 93, 127-144.
- Castro, J.M. and J.N. Moore 2000. Pit lakes: their characteristics and the potential for their remediation. *Environmental Geology* 39, 1254-1260. <http://dx.doi.org/10.1007/s002549900100>.
- Dessouki, T.C.E., J.J. Hudson., B.R. Neal. and M.J. Bogard 2005. The effects of phosphorus additions on the sedimentation of contaminants in a uranium mine pit-lake. *Water Research* 39, 3055-3061. <http://dx.doi.org/10.1016/j.watres.2005.05.009>.
- Dowling, J., S. Atkin, G. Beale and G. Alexander 2004. Development of the Sleeper Pit Lake. *Mine Water and the Environment* 23, 2-11. <http://dx.doi.org/10.1007/s10230-004-0038-y>.
- Fisher, T.S.R. 2002. Limnology of the meromictic Island Copper Mine pit lake. PhD-thesis, University of British Columbia, Vancouver, Canada.
- Frömmichen, R., S. Kellner and K. Friese 2003. Sediment conditioning with organic and/or inorganic carbon sources as a first step in alkalinity generation of acid mine pit lake water (pH 2-3). *Environ. Sci. Technol.* 37, 1414-1421. <http://dx.doi.org/10.1021/es026131c>.
- Frömmichen, R., K. Wendt-Potthoff, K. Friese and R. Fischer 2004. Microcosm Studies for Neutralization of Hypolimnetic Acid Mine Pit Lake Water (pH 2.6). *Environ. Sci. Technol.* 38, 1877-1887. <http://dx.doi.org/10.1021/es034863e>.
- Glombitza, F.: 2001. Treatment of acid lignite mine flooding water by means of microbial sulfate reduction. *Waste Management* 21, 197-203. [http://dx.doi.org/10.1016/S0956-053X\(00\)00061-1](http://dx.doi.org/10.1016/S0956-053X(00)00061-1).
- Grimalt, J.O., M. Ferrer and E. Macpherson 1999. The mine tailing accident in Aznalcollar', *The Science of The Total Environment* 242, 3-11. [http://dx.doi.org/10.1016/S0048-9697\(99\)00372-1](http://dx.doi.org/10.1016/S0048-9697(99)00372-1).
- Hudson-Edwards, K.A., M.G. Macklin, H.E. Jamieson, P.A. Brewer, T.J. Coulthard, A.J. Howard and J.N. Turner 2003. The impact of tailings dam spills and clean-up operation on sediment and water quality in river systems: the Rios Agrio-Guadiamar, Aznalcollar, Spain. *Applied Geochemistry* 18, 221-239. [http://dx.doi.org/10.1016/S0883-2927\(02\)00122-1](http://dx.doi.org/10.1016/S0883-2927(02)00122-1).
- Klapper, H. and M. Schultze 1995. Geogenically acidified mining lakes - living conditions and possibilities of restoration. *Int.Revue ges.Hydrobiol.* 80, 639-653.
- Klapper, H., K. Friese, B. Scharf, M. Schimmele and M. Schultze 1998. Ways of controlling acid by ecotechnology. p. 401-416. In: W. Geller, H. Klapper and W. Salomons (eds.): *Acidic mining lakes - acid mine drainage, limnology and reclamation*, Springer-Verlag, Berlin, Heidelberg, New York. http://dx.doi.org/10.1007/978-3-642-71954-7_22.
- Koschorreck, M., P. Herzsprung, K. Wendt-Potthoff, A. Lorke, W. Geller, G.W. Luther, W. Elsner and M. Müller 2002a. An in-lake reactor to treat an acidic lake: the effect of substrate overdosage. *Mine Water and the Environment* 21, 137-149. <http://dx.doi.org/10.1007/s102300200034>.

- Koschorreck, M., R. Frömmichen, P. Herzsprung, J. Tittel and K. Wendt-Potthoff 2002b, Functions of straw for in situ remediation of acidic mining lakes, *Water, Air and Soil Pollution: Focus* 2 (3), 97-109. <http://dx.doi.org/10.1023/A:1019991326498>.
- Lessmann, D., A. Fyson and B. Nixdorf: 2003a. Experimental eutrophication of a shallow acidic mining lake and effects on the phytoplankton. *Hydrobiologia* 506-509, 753-758. <http://dx.doi.org/10.1023/B:HYDR.0000008628.41451.aa>.
- Lessmann, D., W. Uhlmann, U. Grünewald and B. Nixdorf 2003b. Sustainability of the flooding of lignite mining lakes as a remediation technique against acidification in the Lusatian mining district, Germany. p. 521-527. *In: Farrell, T. and G. Taylor (eds.): Sixth International Conference on Acid Rock Drainage, 14-17 July 2003, Cairns, Queensland, The Australian Institute of Mining and Metallurgy Publication Series No 3/2003. The Australian Institute of Mining and Metallurgy, Carlton Victoria.*
- Levy, D.B., K.H. Custis, W.H. Casey and P.A. Rock 1997. The aqueous geochemistry of the abandoned Spenceville Copper Pit, Nevada County, California. *J. Environ. Qual.* 26, 233-243. <http://dx.doi.org/10.2134/jeq1997.00472425002600010033x>.
- Loop, C.M., B.E. Scheetz and W.B. White 2003. Geochemical evolution of a surface mine lake with alkaline ash addition: Field observations vs. laboratory predictions. *Mine Water and the Environment* 22, 206-213. <http://dx.doi.org/10.1007/s10230-003-0023-x>.
- Lu, M. 2004, Pit lakes from sulphide ore mining, geochemical and limnological characterization before treatment, after limning and sewage sludge treatment. PhD-thesis, Lulea University of Technology, Lulea, Sweden.
- Madejon, P., J.M. Murillo, T. Maranon, F. Cabrera and M.A. Soriano 2003. Trace element and nutrient accumulation in sunflower plants two years after the Aznalcollar mine spill. *The Science of The Total Environment* 307, 239-257. [http://dx.doi.org/10.1016/S0048-9697\(02\)00609-5](http://dx.doi.org/10.1016/S0048-9697(02)00609-5).
- Martin, A.J., J. Crusius, J.J. McNee, P. Whittle, R. Pieters and T.F. Pedersen 2003a. Field-scale assessment of bioremediation strategies for two pit lakes using limnocorrals. p. 529-539. *In: Farrell, T. and G. Taylor (eds.): Sixth International Conference on Acid Rock Drainage, 14-17 July 2003, Cairns, Queensland, The Australian Institute of Mining and Metallurgy Publication Series No 3/2003. The Australian Institute of Mining and Metallurgy, Carlton Victoria.*
- Martin, A.J., T.F. Pedersen, J. Crusius, J.J. McNee and E.K. Yanful 2003b. Mechanisms of metal release from subaqueous mine waste at circum-neutral pH - Examples from four case studies. p. 297-306. *In: Farrell, T. and G. Taylor (eds.): Sixth International Conference on Acid Rock Drainage, 14-17 July 2003, Cairns, Queensland, The Australian Institute of Mining and Metallurgy Publication Series No 3/2003. The Australian Institute of Mining and Metallurgy, Carlton Victoria.*
- Martin, A.J. and T.F. Pedersen 2004. Alteration to lake trophic status as a means to control arsenic mobility in a mine-impacted lake. *Water Research* 38, 4415-4423. <http://dx.doi.org/10.1016/j.watres.2004.08.025>.

- McNee, J.J., J. Crusius, A.J. Martin, P. Whittle, R. Pieters and T.F. Pedersen 2003. The physical, chemical and biological dynamics in two contrasting pit lakes: Implications for pit lake bio-remediation. p. 550-564. *In*: G. Spiers, P. Beckett and H. Conroy (eds.): Proceedings of the Sudbury 2003 - Mining and the Environment, Sudbury, Ontario (Canada), 25.-28.05.2003. Laurentian University, Sudbary.
- Olem, H. (1991): Liming acidic surface waters. Lewis, Chelsea
- Olias, M., J.C. Ceron, I. Fernandez, F. Moral and A. Rodriguez-Ramirez 2005. State of contamination of the waters in the Guadiamar valley five years after the Aznalcollar spill. *Water, Air, and Soil Poll.* 166, 103-119. <http://dx.doi.org/10.1007/s11270-005-8201-z>.
- Olias, M., J.C. Ceron, F. Moral and F. Ruiz 2006. Water quality of the Guadiamar River after the Aznalcollar spill (SW Spain). *Chemosphere* 62, 213-225 <http://dx.doi.org/10.1016/j.chemosphere.2005.05.0155>.
- Parshley, J.V. and R.J. Howell 2003. The limnology of Summer Camp pit lake: A case study. *Mine Water and the Environment* 22, 170-186. <http://dx.doi.org/10.1007/s10230-003-0020-0>.
- Peine, A., A. Tritzschler, K. Küsel and S. Peiffer 2000. Electron flow in an iron-rich acidic sediment - evidence for an acidity-driven iron cycle. *Limnol. Oceanogr.* 45, 1077-1087. <http://dx.doi.org/10.4319/lo.2000.45.5.1077>.
- Pellicori, D.A., C.H. Gammons and S.R. Poulson 2005. Geochemistry and stable isotope composition of the Berkeley pit lake and surrounding mine waters, Butte, Montana. *Applied Geochemistry* 20, 2116-2137. <http://dx.doi.org/10.1016/j.apgeochem.2005.07.010>.
- Poling, G.W., C.A. Pelletier, D. Muggli, J. Gerits, C. Hanks and K. Black 2003. Field studies of semi-passive biogeochemical treatment of acid rock drainage at the Island Copper Mine pit lake. p. 549-558. *In*: Farrell, T. and G. Taylor (eds.): Sixth International Conference on Acid Rock Drainage, 14-17 July 2003, Cairns, Queensland, The Australian Institute of Mining and Metallurgy Publication Series No 3/2003. The Australian Institute of Mining and Metallurgy, Carlton Victoria.
- Prat, N., J. Toja, C. Sola, M.D. Burgos, M. Plans and M. Rieradevall 1999. Effect of dumping and cleaning activities on the aquatic ecosystems of the Guadiamar River following a toxic flood. *The Science of The Total Environment* 242, 231-248. [http://dx.doi.org/10.1016/S0048-9697\(99\)00393-9](http://dx.doi.org/10.1016/S0048-9697(99)00393-9).
- Schultze, M., B. Boehrer, A. Duffek, P. Herzprung and W. Geller 2005. Introduction of river water as a tool to manage water quality in pit lakes. p. 273-279. *In*: J. Loredó and F. Pendas (eds.). Proc. 9th International Mine Water Association Congress (Oviedo, Spain, September 5-7, 2005), Dept. Explotacion y Prospeccion de Minas, Univ. of Oviedo on behalf of the Intern. Mine Water Association, Oviedo, Spain.
- Sola, C., M. Burgos, A. Plazuelo, J. Toja, M. Plans and N. Prat 2004. Heavy metal bioaccumulation and macroinvertebrate community changes in a Mediterranean stream affected by acid mine drainage and an accidental spill (Guadiamar River, SW Spain). *Science of The Total Environment* 333, 109-126. <http://dx.doi.org/10.1016/j.scitotenv.2004.05.011>.